

# Video intercom system


## External unit IP (available in 2-wire version)

### General features:

- Bus 2-wire or IP video door phone
- 2MP HD wide angle camera with infrared night vision
- Two-way audio with built-in speaker and microphone
- Remote monitoring and door unlocking via internal monitor and App or PC software
- IP version -> TCP/IP connection and can be powered with standard PoE
- 2-wire version -> TCP/IP connection via 2-wire/IP converter
- Degree of protection IP65

### Technical specifications:

<b>Optics</b>	2MP HD Wide angle Low illumination IR
<b>Image functions</b>	WDR / DNR / BLC
<b>Viewing angle</b>	Horizontal 146° - Vertical 82°
<b>Audio</b>	Two-way audio with microphone and speaker
<b>Keyboard</b>	Mechanical call bitton
<b>Output (IP)</b>	2 relay output / 12V max 1A
<b>Output (2-wire)</b>	2 relay output / An external power source is required
<b>Input</b>	4 Input
<b>Remote access</b>	Via smartphone App or PC Software
<b>Network interface (IP)</b>	Ethernet 10/100 BaseT / SIP 2.0 Protocol
<b>Network interface (2-wire)</b>	Network connection via 2-wire / SIP 2.0 Protocol
<b>Power supply (IP)</b>	PoE (IEEE 802.3af) / 12 Vdc 500 mA max
<b>Power supply (2 wire)</b>	DC 24 V with 2 wire Hub / 12 Vdc 1700 mA max
<b>Degree of protection</b>	IP65
<b>Operating temperature</b>	-40° C ~ +60° C

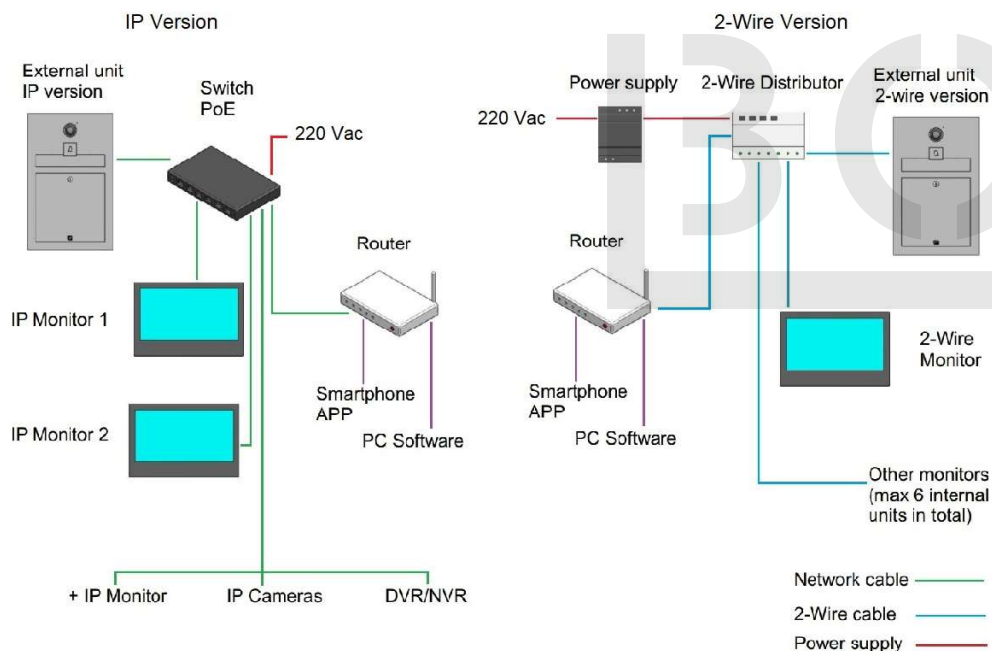

Technical specifications

Video intercom system (external unit)

DESIGN EXCLUSIVELY OWNED BY MARINOX SRL, WHICH RESERVES ALL LEGAL RIGHTS